

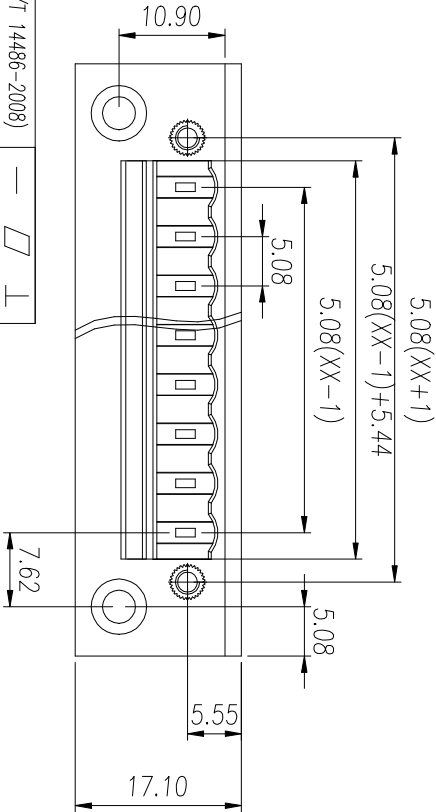
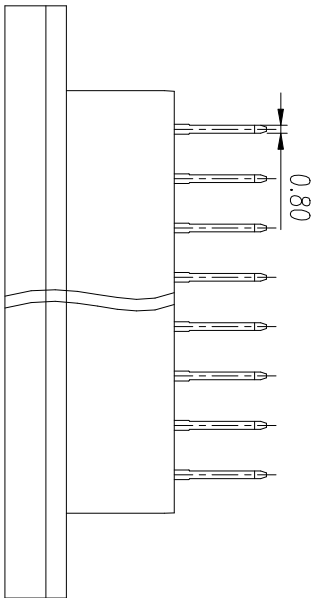


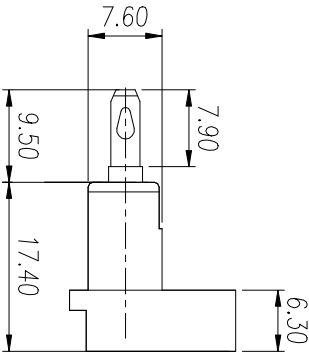

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED
DATE			

5.08(XX-1)+25.4

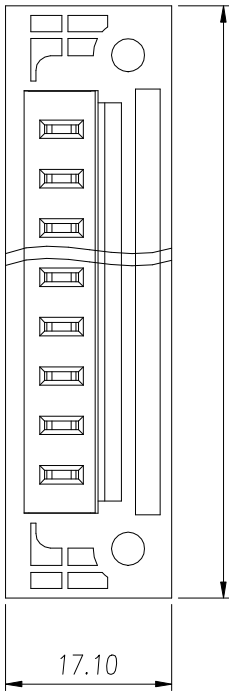

UL/CUL 技术参数					
UL/CUL Technical Data					
等级	Use Group	B	C	D	
额定电压	Rated Voltage	V	300	-	300
额定电流	Rated Current	A	15	-	10
接线范围	Wire Range				
单/多芯线	Solid/Stranded	[AWG]	-		
耐电压	Withstanding Voltage	1600V/1Min			
IEC 技术参数					
IEC Technical Data					
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage	V	320	320	630
额定电流	Rated Current	A <td>12</td> <td>12</td> <td>12</td>	12	12	12
额定冲击电压	Impulse withstand voltage	kV	4.0	4.0	4.0
导线截面积	Conductor cross section	-			
硬质/柔性导线	Solid/flexible	mm ²			
材料					
绝缘材料	Insulation Material	PA66			
阻燃等级	Inflammability	UL94V-0			
导体材料	Conductor Material	铜合金 Copper alloy			
导体表面镀层	Conductive Coating	镀锡 Sn Plated			
一般参数 Other Data					
间距 Pitch /极数 Poles	[mm]/[P]	5.08 /02-24			
剥线长度 Stripping Length	[mm]	-			
螺丝 Screw/扭矩 Torque(Max)	[N.m]	-			
工作温度 Operating temperature	[°C]	-40~105			
焊接温度 Soldering temperature	260°C/5S				
引针尺寸 Pin Dimensions	[mm]	-			
PCB板孔径 PCB Hole Diameter	[mm]	-			

linear dimension(Tolerances Standard GB/T 14486-2008)											
	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	over 100 to 100	over 100 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

单位 /UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	第三视图/THIRD ANGLE PROJECTION	版本 / REV	V0
名称 / TITLE	慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD	WJ2CDGM-5.08-XXP-1YY-00A					